


DS 34 series



MDW or SA ...

EC nutrunners with or without torque transducer for tightening and loosening screws, nuts and related fastening elements – depending on the requirements for the torque accuracy of your screw connection.

The control system MultiPro 3G controls, monitors and checks the tightening process.

A / B

Tightening status


█ OK
Tightening process is okay

█ RUN
Tightening process runs

█ NOK
Tightening process is not okay

Dimensions DS 34

<https://dsmcloud.gmuendcloud.de/url/dsseries>

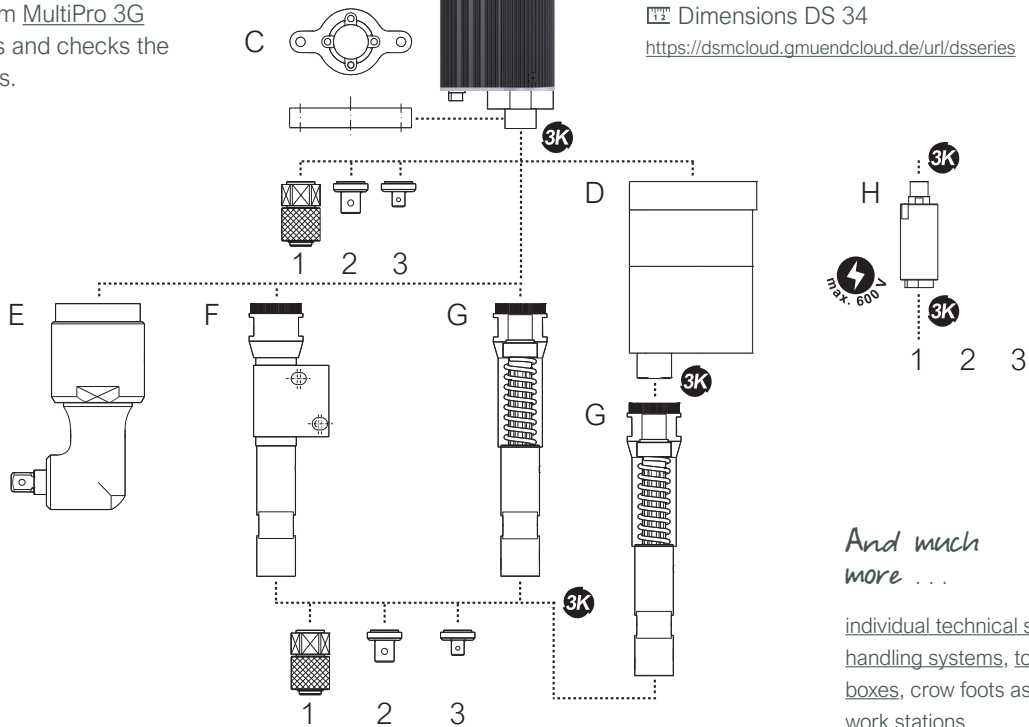

And much more ...

individual technical solutions, handling systems, tool change boxes, crow feets as well as work stations.

A DS 34 MDW with torque transducer

Type	Max. torque	Application area	Max. speed	Angle resolution	Article number
DS 34 / 025 MDW	2,5 Nm	0,5 - 2,5 Nm	880 rpm	0,1 °	DS-2340025
DS 34 / 05 MDW	5 Nm	1 - 5 Nm	880 rpm	0,1 °	DS-2340050
DS 34 / 10 MDW	10 Nm	2 - 10 Nm	1540 rpm	0,1 °	DS-2340100
DS 34 / 15 MDW	15 Nm	3 - 15 Nm	1540 rpm	0,1 °	DS-2340150


Torque accuracy 0,5 %, torque tolerance better 5 % according to ISO 5393; Execution „WA (Angle head)“: torque tolerance better 8% according to ISO 5393

B DS 34 SA without torque transducer (current controlled)

Type	Max. torque	Application area	Max. speed	Angle resolution	Article number
DS 34 / 05 SA	5 Nm	1 - 5 Nm	880 rpm	3,3 °	DS-2341050
DS 34 / 10 SA	10 Nm	2 - 10 Nm	1540 rpm	1,7 °	DS-2341100
DS 34 / 15 SA	15 Nm	3 - 15 Nm	1540 rpm	1,7 °	DS-2341150

Torque accuracy depends on the adjustment of the nutrunner

DS 34 series



C Mounting flange

Type	Article number
Mounting flange	DS-2343000
Mounting flange for angle head	DS-2343002

E Angle head 3/8"

Type	Article number
WA (3/8") Angle head	DS-2343010

F Spring output

Type	Article number
Spring output 30 mm	DS-2403025
Spring output 50 mm	DS-2403030

H Output unit with galvanic isolation

Type	Article number
Output unit 3K-GT-3K	DS-2403730
In: DSM 3K	
Out: DSM 3K	

1 Hexagonal quick release element D6,3

Type	Article number
Bit shaft precision-guide 13 mm	DS-2403705
Bit shaft precision-guide 24 mm	DS-2403710

2 Square drive 3/8"

Type	Article number
Square drive 3/8"	DS-2403720

D Output offset 3K (max. 10 Nm)

Type	Article number
Output offset V1	DS-2343005

Nutrunner MDW / SA	Max. speed
DS 34 / 025 -WA	550 rpm
DS 34 / 05 -WA	550 rpm
DS 34 / 10 -WA	1070 rpm
DS 34 / 15 -WA	1070 rpm

G Spring output with self start initiator

Type	Article number
Spring output (30 mm) with self start INI	DS-2403035
Spring output (50 mm) with self start INI	DS-2403040

FACT: Galvanic isolation

The output unit „GT“ is used for the electrical separation between nutrunner and screw location. By using an output unit that acts as an isolator it is not possible for the charge carrier in the circuit to pass from one circuit to the other because the conductive, electrical connection does not exist and therefore no current can flow through.

3 Square drive 1/4"

Type	Article number
Square drive 1/4"	DS-2403715