
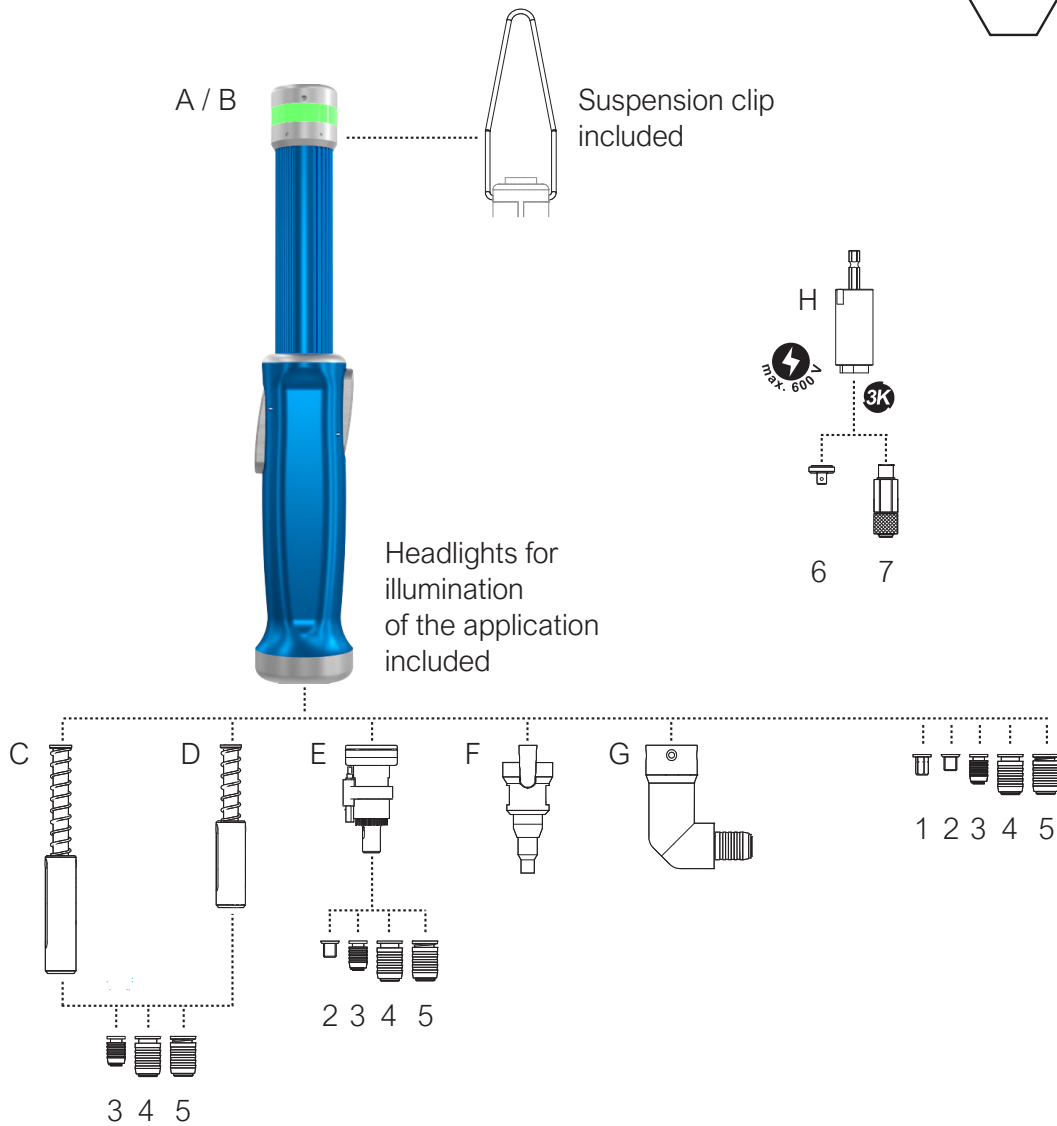


DSH 26 series

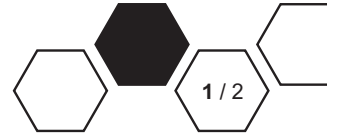

A DSH 26 MDW with torque transducer

Type	Max. torque	Application area	Max. speed	Angle resolution	Article number
DSH 26 / 005 MDW	0,5 Nm	0,05 - 0,5 Nm	1450 rpm	3,7 °	DSH-2260005
DSH 26 / 01 MDW	1 Nm	0,2 - 1 Nm	1450 rpm	3,7 °	DSH-2260010
DSH 26 / 02 MDW	2 Nm	0,4 - 2 Nm	1020 rpm	2,6 °	DSH-2260020
DSH 26 / 04 MDW	4 Nm	0,8 - 4 Nm	400 rpm	1,0 °	DSH-2260040


Torque accuracy 0,5 %, torque tolerance better 5 % according to ISO 5393

B DSH 26 SA without torque transducer (current controlled)

Type	Max. torque	Application area	Max. speed	Angle resolution	Article number
DSH 26 / 005 SA	0,5 Nm	0,05 - 0,5 Nm	1700 rpm	4,3 °	DSH-2261005
DSH 26 / 01 SA	1 Nm	0,2 - 1 Nm	1700 rpm	4,3 °	DSH-2261010
DSH 26 / 02 SA	2 Nm	0,4 - 2 Nm	820 rpm	2,1 °	DSH-2261020
DSH 26 / 04 SA	4 Nm	0,8 - 4 Nm	400 rpm	1,0 °	DSH-2261040

Torque accuracy depends on the adjustment of the nutrunner

DSH 26 series



C / D Spring output

Type	Article number
Spring output 20 mm	DS-2263010
Spring output 50 mm	DS-2263015

F Vacuum screw-retainer

Type	Article number
With electric supply unit	DS-2263895
With pneumatic supply unit	DS-2263896

1 Hexagon drive 1/4"

Type	Article number
Hexagon drive 1/4"	DS-2263725

3 Hexagonal quick release element B3

Type	Article number
Hexagonal quick release element B3	DS-2263720

5 Hexagonal quick release element D6,3

Type	Article number
Bit shaft precision-guide 13 mm	DS-2263705
Bit shaft precision-guide 24 mm	DS-2263710

H Output unit with galvanic isolation

Type	Article number
Output unit 1/4" _24mm-GT-3K	DS-2403735
In: 1/4" hex 24 mm length, DIN3126 - E6,3	
Out: DSM 3K	

6 Square drive 1/4"

Type	Article number
Square drive 1/4" (3K insert)	DS-2403715

E Self start output

Type	Article number
Self start with 5 mm spring deflexion	DS-2263020

G Angle head

Type	Article number
Angle head (D6,3)	DS-2263025
Torque tolerance better 8 % acc. to ISO 5393	

2 Square drive 1/4"

Type	Article number
Square drive 1/4"	DS-2263730

4 Hexagonal quick release element B5,5

Type	Article number
Hexagonal quick release element B5,5	DS-2263715

7 Hexagonal quick release element D6,3

Type	Article number
Bit shaft precision-guide 13 mm	DS-2403705
Bit shaft precision-guide 24 mm	DS-2403710

Cable

Cable for interconnection between nutrunner DSH 26 and control system MultiPro 3G

Type	Cable length	Article number
Interconnecting cable DSH 16 / DSH 26 / DS 26 DSP05	5 m	MK-2269005